


GG

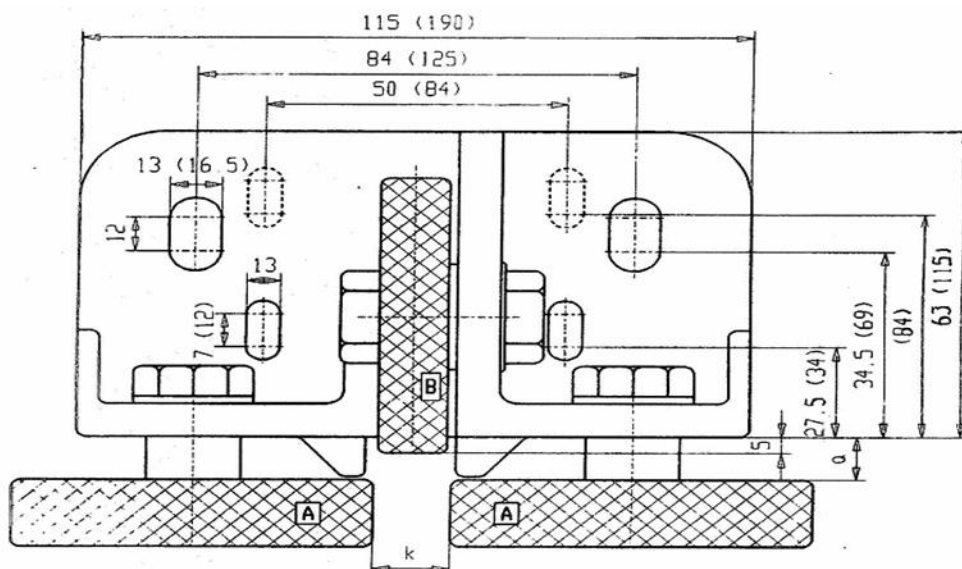

Dimensions GG (differing dimensions for FK in parenthesis)

art.-no.	type	VU-coating [° Shore A]	roller A [mm]	roller B [mm]	total height [mm]	length [mm]	max. capacity at 2,5 m/s	a [mm]	k [mm]
roller guide GG for counterweight and yoke guide									
300 050	GG 1	93	Ø 50 x 18	Ø 50 x 15	65	94	900 N	10	5 - 16
300 051	GG 2	93	Ø 60 x 18	Ø 50 x 15	70	94	1.050 N	10	5 - 16
300 052	GG 3	80	Ø 50 x 18	Ø 50 x 15	65	94	450 N	10	5 - 16
300 053	GG 4	80	Ø 60 x 18	Ø 50 x 15	70	94	550 N	10	5 - 16
300 054	GG 5	93	Ø 70 x 20/12	Ø 50 x 15	75	96	1.050 N	10	5 - 9
300 055	GG 6	80	Ø 70 x 20/12	Ø 50 x 15	75	96	450 N	10	5 - 9
roller guide FK for car									
300 060	FK 1	93	Ø 100 x 25	Ø 100 x 20	125	155	2.100 N	10	5 - 20
300 061	FK 2	93	Ø 100 x 30	Ø 100 x 20	125	160	2.500 N	10	5 - 20
300 062	FK 3	93	Ø 100 x 40	Ø 100 x 20	125	163	3.100 N	10	5 - 20
300 063	FK 4	93	Ø 125 x 30	Ø 100 x 20	137,5	160	2.800 N	10	5 - 16
300 064	FK 5	93	Ø 125 x 40	Ø 100 x 20	137,5	163	3.700 N	10	5 - 16

Further details upon request