
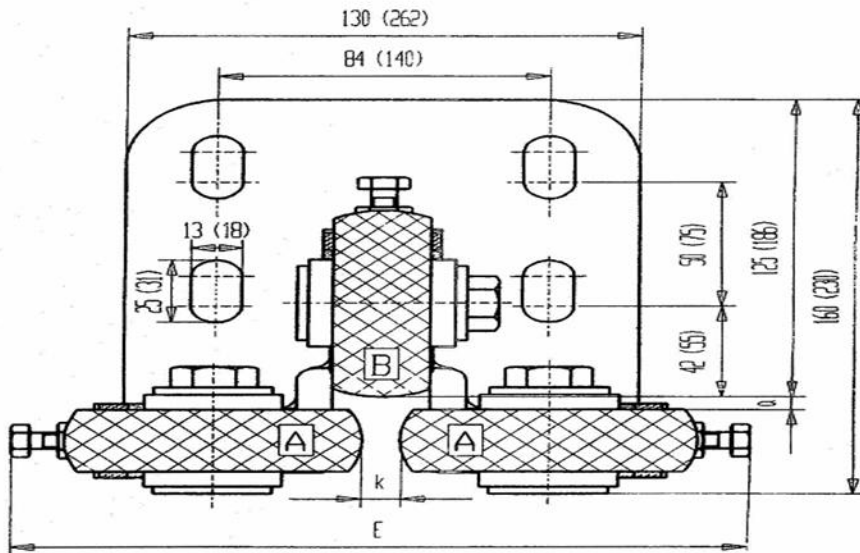


RFG

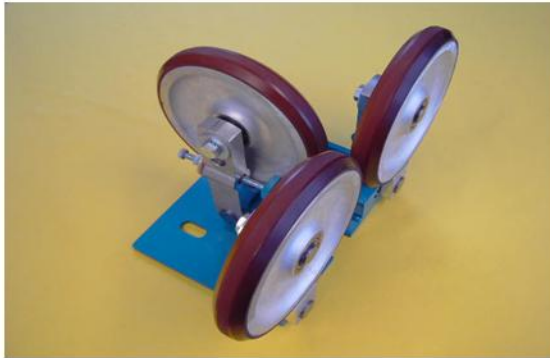

Dimension RFGK (RFG in parenthesis)

art.-no.	type	VU-coating [° Shore A]	roller A [mm]	roller B [mm]	total height [mm]	length [mm]	width E [mm]	max. capacity	a [mm]	k [mm]
RFGK spring loaded roller guide, small										
300 090	RFGK 1	85	Ø 75 x 25	Ø 75 x 25	153	160	≈ 175	2.000 kgs ^{a)}	1	5 - 16
300 091	RFGK 2	85	Ø 100 x 25	Ø 100 x 25	180	160	≈ 215	2.500 kgs ^{a)}	1	5 - 16
RFG spring loaded roller guide										
300 080	RFG 1	85	Ø 150 x 30	Ø 150 x 30	255	230	≈ 320	2.500 kgs ^{a)}	14	9 - 20
300 082	RFG 3	85	Ø 200 x 30	Ø 200 x 30	280	230	≈ 430	3.500 kgs ^{a)}	14	9 - 20

^{a)} max. capacity at 5 m/s